Town of South Bristol Wood, Gas, and Solid Fuel Burning Permit Application

This installation must be inspected by the code enforcement officer prior to being used, call 585-374-6341


Date:	Permit #: Fee: \$ 25.00				
Property Owner:					
Tax Map ID #:					
Telephone #:		Email:			
Application for:	New	Replacement	Repair		
Wood Stove	Coal Stove _		Pellet Stove		
Fireplace	Chimney		Furnace		
Manufacturer:		Instal	lation instructions attached		
Make:	Model:		Serial #:		
Will this be installed	by a professional?	Yes	No		
If yes, by whom?			Insurance attached		
Telephone #:	Address:				
Received application	and fee:	Receive	ed by:		
	**Code Enforce				
Room Unit was Inst			<u> </u>		
		Vitaban	Other		
Dasement	Livingroom	Kitchen	Other		
Smoke Detector	Yes	No			
C02 Detector	Yes				
Fire Extinguisher	Yes				
Temperature Alert	Yes				
Clean Out Provided	Yes	No			
Another Heat Source					


Page 1 of 2

Chimney

Metal Masonry	Diameter	Clay	Flue	
Is chimney three (3) feet above peal Is it U.L. listed?	k?	Yes Yes	No No	
If yes, what is U.L. number?		1 68	NO	
Is chimney inside?		Ves	No	
Is chimney outside?		Yes	No	
Is chimney in good repair?			No	
Is chimney properly supported?		Yes	No	
Is there fire block?			No	
Triple Wall Double Wall	Solid I	nsulated		
Wood Stove				
Is it U.L. listed?		Yes	No	
Is it 36ö from any combustible surfa	ace?	Yes		
Is flooring material non-combustibl	e?	Yes	No	
Is there an 18ö non-combustible are	ea around stove?	Yes	No	
Fireplace				
Is outside air provided?		Yes	No	
Are glass doors provided?		Yes	No	
Is hearth minimum of 18ö?		Yes	No	
Is combustible material a distance f	rom fire box?	Yes	No	
Stove Pipes				
Are three sheet metal screws used p	er connection?	Yes	No	
Is there a minimum of 18ö from wa	lls and ceiling?	Yes	No	
Furnace				
Are electrical connections proper?		Yes	No	
Is this a combination unit?		Yes	No	
ApprovedDisapprove	ed			
Code Enforcement Officer's Sign	ature		Date	

Page 2 of 2







THIMBLE OR CONNECTOR THROUGH COMBUSTIBLE WALL (MINIMUM 18" AIRSPACE OR NONCOMBUSTIBLE MATERIAL AROUND THIMBLE OR CONNECTO

Figure 2.2-10

Courtesy Wood Heating Education and Research Foundation

Secondly - listed factory-built chimneys may be used to pass through combustible walls and chimneys if installed according to the conditions of the listing and the manufacturer's instructions. The Wood Heating Education and Research Foundation pointed out in their text materials that as of 1984 there was no manufacturer of a factory-built chimney listing a through-the-wall connection unless the connection was for a continuous factory-built chimney. A section of factory-built chimney used to penetrate a wall or partition and connected on both sides to stovepipe, or connected on one side to stovepipe and the other side to a masonry chimney are therefore not listed uses of factory built chimney sections. Although some authors suggest such arrangements, their use without proper listing is at this printing not recommended. Experience has indicated that such installations can result in leaking joints and sometimes additional creosote problems.



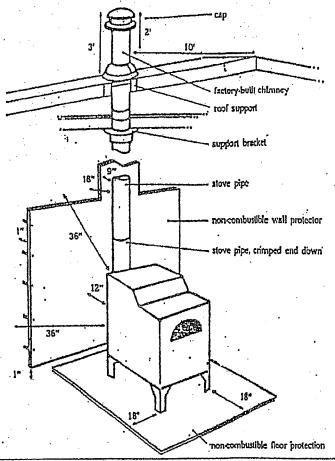

From:	Combustibles	· ·	she . metal with 1" airspace		
A. Listed Wood Heater Front Side, Back Top	36" 36" 36"		12" 12"		
B. Single Wall Connecter (24 gauge or heavier)	r Plpe 18"		9"		
C. Chimney Height	3 feet higher than roo 2 feet higher than any within 10 feet [measure	part of roof			